

## Features

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-2668RT

- 32 ft (9.92 m) working height
- Up to 1,250 lb (567 kg) lift capacity

##### GS™-3268RT

- 38 ft (11.75 m) working height
- Up to 1,000 lb (454 kg) lift capacity

#### PRODUCTIVITY

- 99 x 61 in (2.51 x 1.55 m) steel platform
- 60 in (1.52 m) extension deck
- Folding guardrails
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- AC power to platform
- Full height swing gate
- 4WD
- Positive traction control
- Four-wheel braking
- Swing-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter

#### POWER

- Kubota gas/LPG 22 hp (16 kW)

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Automatic leveling hydraulic outriggers
- Air line to platform
- Pipe cradle (pair)
- Non-marking rough terrain tires 12 x 23.5 in (30 x 60 cm)
- Dual flashing beacons
- Motion alarm
- Platform work lights

#### POWER OPTIONS

- Kubota diesel 20 hp (15 kW)
- Perkins diesel 26 hp (19 kW)
- 3000 AC Watt generator (120V/60 Hz)
- 2500 AC Watt generator (120V/50 Hz or 240V/50 Hz)
- Diesel Scrubber (Perkins)
- Cold weather package
- Arctic package
- Hydraulic oil cooler
- LPG steel tank only, 33.5 lb capacity
- Additional LPG tank and carrier



### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone **+1 (425) 881-1800**  
Toll Free in USA/Canada **+1 (800)-536-1800**  
Fax **+1 (425) 883-3475**

### Genie Europe

Millennium House  
Brunel Drive  
Newark NG24 2DE  
UK  
Telephone **+44 (0)1476 584333**  
Fax **+44 (0)1476 584334**  
Email: [infoeurope@genieind.com](mailto:infoeurope@genieind.com)

### Distributed By:

Effective Date: January, 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex® is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2008 Terex Corporation.

GS68RT 3.5K 0108G. Part No. 109350

[www.genieindustries.com](http://www.genieindustries.com)

## SELF-PROPELLED SCISSOR LIFTS

# GS™-2668 RT & GS™-3268 RT



## Specifications

| MODELS                             | GS™-2668 RT       |              | GS™-3268 RT  |         |
|------------------------------------|-------------------|--------------|--------------|---------|
| MEASUREMENTS                       | US                | Metric       | US           | Metric  |
| Working height maximum*            | 32 ft             | 9.92 m       | 38 ft        | 11.75 m |
| <b>A</b> Platform height maximum   | 26 ft             | 7.92 m       | 32 ft        | 9.75 m  |
| <b>B</b> Platform height - stowed  | 3 ft 10.75 in     | 1.19 m       | 4 ft 3.75 in | 1.31 m  |
| <b>C</b> Platform length - outside | 8 ft 3 in         | 2.51 m       | 8 ft 3 in    | 2.51 m  |
|                                    | extended          | 13 ft        | 3.96 m       | 3.96 m  |
| Slide-out platform extension deck  | 5 ft              | 1.52 m       | 5 ft         | 1.52 m  |
| <b>D</b> Platform width - outside  | 5 ft 1 in         | 1.55 m       | 5 ft 1 in    | 1.55 m  |
| Toeboard height                    | 6 in              | .15 m        | 6 in         | .15 m   |
| <b>E</b> Height - stowed**         | 7 ft 7.5 in       | 2.32 m       | 8 ft 5 in    | 2.45 m  |
|                                    | rails lowered     | 5 ft 7 in    | 1.70 m       | 1.83 m  |
| <b>F</b> Length - stowed           | 8 ft 9 in         | 2.67 m       | 8 ft 9 in    | 2.67 m  |
|                                    | platform extended | 13 ft 5.5 in | 4.10 m       | 4.10 m  |
|                                    | with outriggers   | 10 ft 9 in   | 3.28 m       | 3.28 m  |
| <b>G</b> Width                     | 5 ft 8 in         | 1.73 m       | 5 ft 8 in    | 1.73 m  |
| <b>H</b> Wheelbase                 | 6 ft 1 in         | 1.85 m       | 6 ft 1 in    | 1.85 m  |
| <b>I</b> Ground clearance - center | 7.5 in            | .19 m        | 7.5 in       | .19 m   |

### PRODUCTIVITY

|                               |               |            |              |            |
|-------------------------------|---------------|------------|--------------|------------|
| Maximum platform occupancy*** | 4             | 4          | 4            | 4          |
| Lift capacity                 | 1,250 lbs     | 567 kg     | 1,000 lbs    | 454 kg     |
| Extension deck capacity       | 300 lbs       | 136 kg     | 300 lbs      | 136 kg     |
| Drive speed - stowed          | 3.8 mph       | 6.1 km/h   | 3.8 mph      | 6.1 km/h   |
| Drive speed - raised          | 0.5 mph       | 0.8 km/h   | 0.5 mph      | 0.8 km/h   |
| Gradeability - stowed****     | 35%           |            | 30%          |            |
| Maximum outrigger leveling:   | front to back | 6.6°       | 6.6°         |            |
|                               | side to side  | 10.6°      | 10.6°        |            |
| Turning radius - inside       | 5 ft          | 1.52 m     | 5 ft         | 1.52 m     |
| Turning radius - outside      | 12 ft 1 in    | 3.68 m     | 12 ft 1 in   | 3.68 m     |
| Raise/lower speed             | 30/35 sec     |            | 40/37 sec    |            |
| Controls                      | proportional  |            | proportional |            |
| Drive                         | four wheel    |            | four wheel   |            |
| Tires - rough terrain         | 12 x 23.5 in  | 30 x 60 cm | 12 x 23.5 in | 30 x 60 cm |

### POWER




|                           |                                                                                          |                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Power source              | Kubota DF-752 gas/LPG 22 hp<br>Kubota D-905 Diesel 20 hp<br>Perkins 403C-11 Diesel 26 hp | Kubota DF-752 gas/LPG 22 hp<br>Kubota D-905 Diesel 20 hp<br>Perkins 403C-11 Diesel 26 hp |
| Fuel tank capacity        | 15 gal 56.8 L                                                                            | 15 gal 56.8 L                                                                            |
| Hydraulic system capacity | 16.5 gal 62.5 L                                                                          | 16.5 gal 62.5 L                                                                          |

### WEIGHT\*\*\*\*\*

|  |                    |                    |
|--|--------------------|--------------------|
|  | 6,373 lbs 2,891 kg | 8,008 lbs 3,632 kg |
|--|--------------------|--------------------|

### STANDARDS COMPLIANCE

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

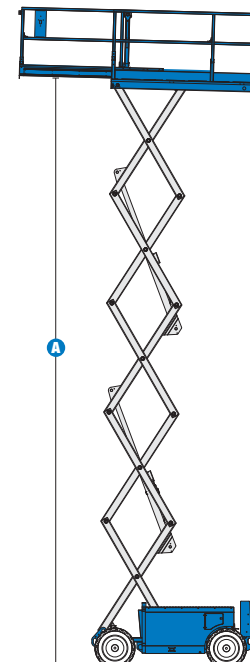

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.

\*\*\* CE/AUS markets: GS-3268 limited to 2 person platform occupancy when used outdoors.

\*\*\*\* Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

\*\*\*\*\* Weight varies depending on options and country standards.

[www.genieindustries.com](http://www.genieindustries.com)